


MODEL SM-78MD

AIRPLACO
EQUIPMENT COMPANY

Since 1946

SprayMaster

Self Contained Pump/Mixer

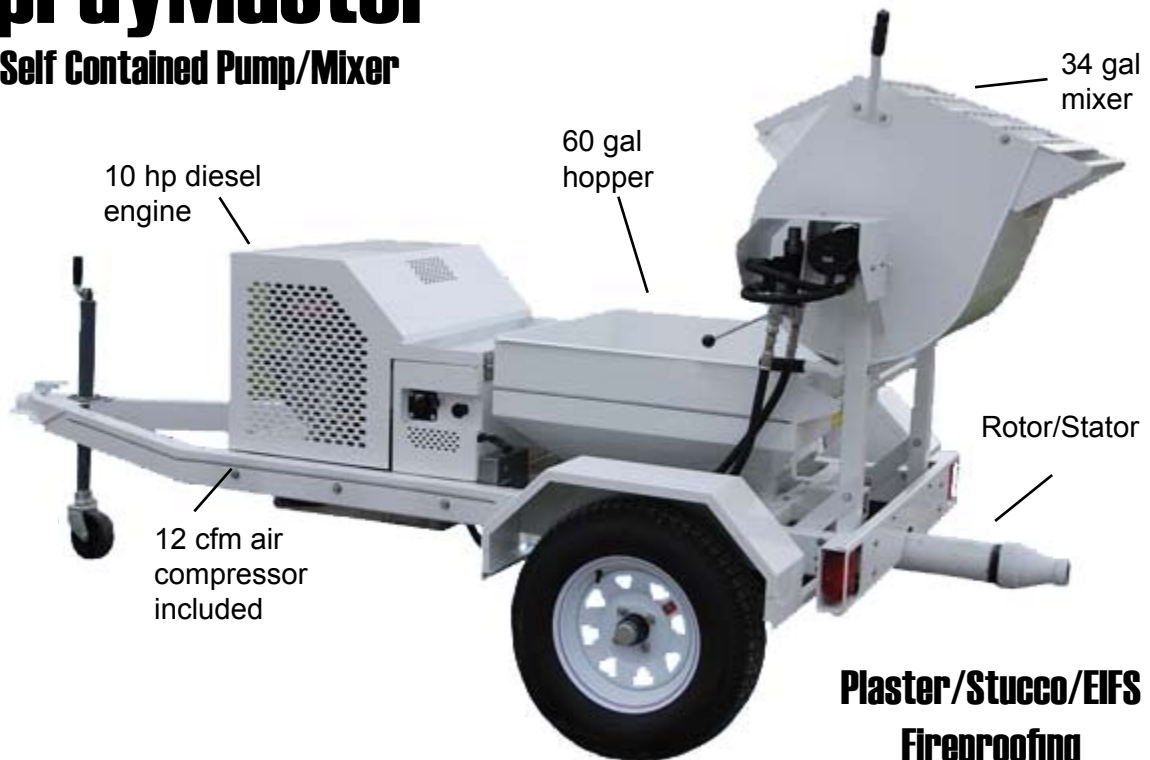

SPECIFICATIONS

Max. Production Capacity	0-10 gal / min. (38L per min)
Air Output	12 cfm @ 90 psi (6.2 bar)
Pumping Distance	200 ft (61m)
Material Hopper	60 gal (8 cu ft) (227L)
Rotor / Stator	2L6 optimized
Outlet Size	2 in
Max. Aggregate Size	.125 in (3mm)
Engine	10 hp diesel
Overall Dimensions	66 in W x 131 in L x 67 in H 1.7m W x 3.3m L x 1.7m H
Hopper Height	35 in (889mm)
Approx. Weight	1,270 lb (576kg)
Controls	Manual / Remote
Mixer Capacity	34 gal (4.5 cu ft) (127L)
Mixer Controls	Hydraulic

Performance is relative to cycle rate, mix characteristics, line size and distance. Max output, line pressure and distance cannot be achieved simultaneously. Specifications are subject to change.

Plaster/Stucco/EIFS
Fireproofing
Acoustical
Cementitious Coatings
Manhole Relining
Overlayments



Northeast

4141 Airport Road
Cincinnati, OH 45226
Phone: 513.321.2950
888.349.2950
ohsales@airplaco.com

West

1726 South Magnolia Ave.
Monrovia, CA 91016
Phone: 626.256.9310
888.393.8635
casales@airplaco.com

Southeast

9202 Meadow Vista Blvd.
Houston, TX 77064
Phone: 281.469.7102
866.469.7102
txsales@airplaco.com