



GROUT PUMP  
**PRO-CRETOR**



## BENEFITS

- High Pressure
- Easy to Maintain
- Self-Contained

# MULTIPURPOSE GROUT PUMP

The Airplaco Pro-Cretor PC-3 high pressure pump/mixer is an all-in-one solution for shotcrete material placement, concrete lifting, grouting and general concrete repair.

# GROUT PUMP PROCRETOR

The Pro-Cretor is commonly used for road and highway maintenance, structural concrete reinforcement, road slabjacking, bridge and tunnel shotcrete repairs, it is approved by counties, municipalities, cities and state road departments for a range of concrete infrastructure maintenance. The PC-3 incorporates a 3 inch S-tube material valve with reversing capabilities, dual hard-chrome plated material cylinders, variable speed hydraulic piston pump with remote, 46 HP diesel engine, wide axle 6K GVW trailer with hydraulic surge brakes.

## APPLICATIONS:


- Shotcrete
- Concrete Leveling
- Pressure Grouting
- Refractory
- Soil Stabilization
- Concrete/Bridge Repair



## 3 INCH SWING TUBE



## FORWARD/REVERSE CAPACITY

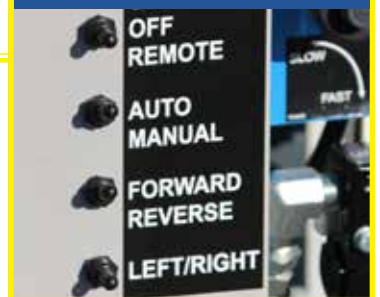

## PRO-CRETOR PC-3 SPECIFICATIONS

Max Output	7 yd <sup>3</sup> /hr (5.3m <sup>3</sup> )
Max Line Pressure	0 TO 1,300 PSI (88 BAR)
Material Hopper	11 cu ft (311 L)
Material Cylinder	Dual 3 in.
Stroke	16 in.
Max Aggregate	3/4 in. (19 mm)
Power Source	46 hp diesel
Dimensions	79 x 148 x 50 in. (W x L x H)
Hopper Height	43 in. (109 cm)
Weight	3,770 lb (1710 kg)
Material Valve	3 Inch Swing Tube

## CENTRALIZED CONTROLS



*Disclaimer: Maximum output distance and pressure cannot be reached simultaneously. Performance will vary depending on the operator, cycle rate, mix design, and placement line.*

**AIRPLACO**<sup>®</sup>  
AMERICAN OWNED. AMERICAN BUILT.